


Asserta - Industrial Sounder

The Asserta warning sounder is designed to cope with harsh environments requiring protection up to IP66. Design features are incorporated to ensure safe and easy installation, while providing flexibility with fewer product variants.



Technical Specification

Voltage	18 - 28Vdc
Current	110dB(A) - 105mA @ 24Vdc 120dB(A) - 450mA @ 24Vdc
Output	110dB(A) (Typical Tone 3) 120dB(A) (Typical Tone 3)
Tones	42
Alarm Stages	3
Volume Control	10dB(A)
Time Out	5 mins - 40 mins (user selectable)
Monitoring	Reverse polarity (dc version)
Temperature	- 25°C to + 70°C
Protection	IP66
Construction	ABS
Weight	1.6Kg (dc version) 2.5Kg (mains version)
Colour	Red or grey

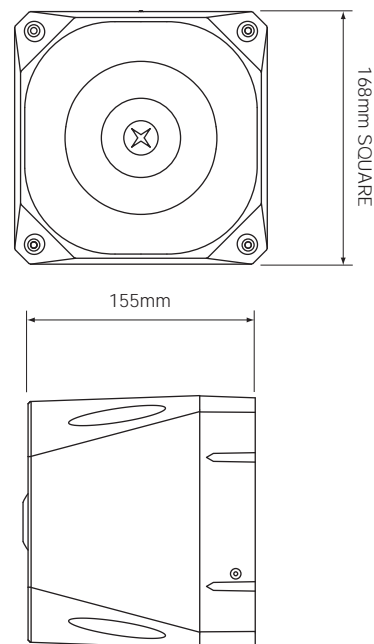

Features

- Powerful 120dB(A) output
- 3 stage alarm and time out function
- 42 alarm tones
- Robust design with IP66 protection

Benefits

- Maximum sound output for high noise environments
- 3 levels of alarm for differing warning states
- Large range of tone options
- For demanding environments in non-hazardous areas

Reference

AS/S/24/120/R
AS/S/24/120/G
AS/S/024/R/110
AS/S/024/G/110

Catalogue No.

7011124FUL-0012X
7092272FUL-0149X
7011124FUL-0012X
7011214FUL-0044X

Description

Asserta Sounder, 24V, Red, 120dB
Asserta Sounder, 24V, Grey, 120dB
Asserta Sounder, 24V, Red, 110dB
Asserta Sounder, 24V, Grey, 110dB