

# Spectra® Pro IR Series IP PTZ Outdoor Domes

## HIGH-SPEED PTZ, 30X MODELS, FULL HD, WDR, LOW-LIGHT PERFORMANCE

### Product Features

- 850 nm IR Illumination to 150 m
- H.265, H.264, and MJPEG Video Encoding
- Tilt Range +15° to -90° Degrees
- Low Light Down to 0.3 lux
- IR Illumination with Proportional Brightness Based Upon Zoom
- 100 dB Wide Dynamic Range (WDR)
- Sabotage and Simple Motion Detection
- Up to Full HD 1080p
- Up to 60 Images per Second (ips)
- Power Over Ethernet (802.3bt), 24 VAC, 48 VDC
- Digital Image Stabilizer (DIS)
- Up to 2 TB Edge Storage with micro SDHC/SDXC Card
- 3-Year Warranty and Support



VideoXpert™



### IR Illumination with Lookup

Pelco's Spectra® Pro IR Lookup Series can see in absolute darkness. The infrared illumination (IR) has proportional brightness based upon zoom, creating visible pictures without any light up to 150 m from the camera.

The IR wavelength is 850 nm giving an almost undetectable light source in locations where visible light is undesired or light pollution is regulated.

The Pro IR Series offers a wider tilt range giving the camera the ability to look above the horizon 15 degrees (center of field of view).

### Full High Definition Cameras

Spectra Pro IR Lookup Series provides Full HD 1080p 30x optical zoom cameras that run at up to 60 frames per second and provide 100dB of Wide Dynamic Range (WDR). The new camera is available with 30x optical zoom.

### Embedded Features

Included in all models are built in video analytics (e.g. Sabotage and Simple Motion Detection). Spectra Pro IR also allows for up to 8 configurable privacy zones. White Balance modes including Auto, Manual, or Off are available for overcoming difficult lighting conditions day and night. Spectra Pro IR supports up to 2 TB of onboard local storage (not supplied) that is easily accessible through the ONVIF Profile G protocol or FTP.

### Video Encoding

Spectra Pro IR Lookup Series provides three methods of video encoding: H.265 Main profile, H.264 High/Main/Baseline profiles and MJPEG.

### Intuitive Design

Spectra Pro IR Lookup Series features the same ease of installation and maintenance that you have come to expect from Spectra.

### VMS Integration

Spectra Pro IR Lookup easily connects to Pelco IP and hybrid video systems such as VideoXpert, Endura 2.0 (or later), and Digital Sentry 7.3 (or later). The camera is also compatible with Digital Sentry NVS (DS NVS), a full-featured video management software, which is available as a free download at [www.pelco.com](http://www.pelco.com). DS NVS includes four free Pelco IP licenses and allows for the management of video from up to 64 cameras.

Pelco endeavors to be the most open and integrated camera provider in the industry and as a part of that effort Spectra Pro IR Lookup is integrated with a long and ever-growing list of 3rd party software and Video Management Systems (VMS).



by Schneider Electric



International Standards  
Organization Registered Firm;  
ISO 9001 Quality System




C4054 / Prelim 4-17-18

## BACK BOX FEATURES



NOTE: VALUES IN PARENTHESES ARE INCHES; ALL OTHERS ARE CENTIMETERS.

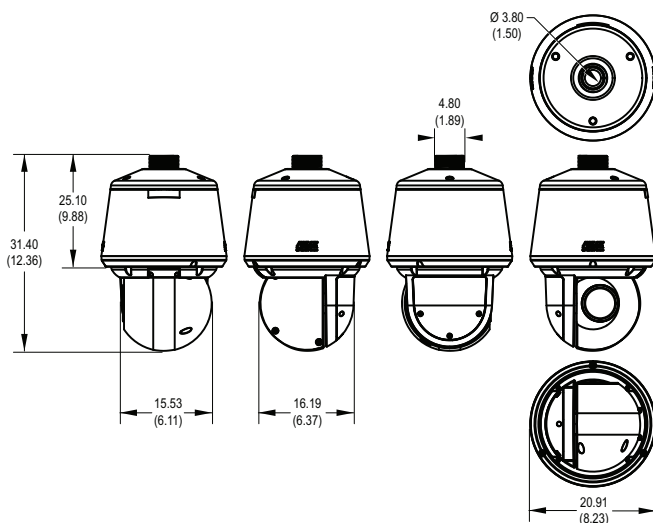

### Environmental Pendant

- Environmental Pendant Available in Light Gray Finish, RAL7047
- Aluminum Construction
- Type 4X and IP66
- Uses 1 1/2-inch NPT Thread
- Includes Sun Shield, Heater, and Blower
- -40° to 50°C (-40°F to 122°F) Sustained Operating Temperature

## CAMERA/OPTICS

Specification		30X
Sensor Type		1/3-inch CMOS Sensor
Optical Zoom		30X
Digital Zoom		32X
Maximum Resolution		1920 x 1080
Lens		f/1.6 ~ f/4.7, focal length 4.3 mm (wide) ~ 129 mm (tele)
Horizontal Angle of View		58.9° (wide) ~ 2.11° (tele)
Aspect Ratio		16:9
Light Sensitivity	Color (33 ms)	0.3 lux
	Color (125 ms)	0.07 lux
	Mono (33 ms)	0.1 lux
	Mono (125 ms)	0.02 lux
		<b>Note:</b> Sensitivity in lux for 90% reflectance, f/1.6 (wide angle), 45 dB gain at 30 IRE (30% of signal level)
Day/Night Capabilities		Yes
Shutter Range		1/8 ~ 1/3,000 sec
Signal-to-Noise Ratio		>45 dB
IR Cut Filter		Yes
Wide Dynamic Range		100 dB
Iris Control		Auto iris with manual override
Backlight Compensation		Yes
Automatic Gain Control		Yes
Active Noise Filtering		3D Noise Filtering
Digital Image Stabilization (DIS)		Yes

# TECHNICAL SPECIFICATIONS

## SOFTWARE FEATURES

- 256 presets
- 16 tours
- 8 patterns
- Field of View scan
- $\pm 0.1^\circ$  preset accuracy
- Multilingual menus (English, Spanish, Portuguese, Italian, German, French, Russian, Turkish, Arabic, Simplified Chinese, and Korean)
- Password protection
- 8 window blanks, configurable in size
- "Auto Flip" feature rotates dome 180° at bottom of tilt travel
- Configurable park with actions
- Proportional pan/tilt continually decreases pan/tilt speeds in proportion to depth of zoom
- Image Defog modes

## ANALYTICS BEHAVIORS

- **Camera Sabotage:** Detects contrast changes in the field of view. An alarm is triggered if the lens is obstructed by spray paint, a cloth, or a lens cap. Any unauthorized repositioning of the camera also triggers an alarm.
- **Motion:** Generates an alarm in a high traffic area when a person or object moves.

## VIDEO

Video Encoding	H.264 High, Main, or Baseline or H.265 Main, MJPEG
Video Streams	Up to 3 simultaneous streams; the second and third stream is variable based on the setup of the primary stream
Frame Rate	Up to 60, 50, 30, 25, 15, 12.5, 10, 8.333, 7.5, 6, 5, 3, 2.5, 2, 1 (depending on the coding, resolution, and stream configuration)

Available Resolutions

Resolution				H.264 High Profile (IP GOP structure)	
MPx	Width	Height	Aspect Ratio	Maximum IPS	Recommended Bit Rate (Mbps)
2.07	1920	1080	16:9	60	TBD
2.07	1920	1080	16:9	30	TBD
0.92	1280	720	16:9	30	TBD
0.36	960	540	16:9	30	TBD
0.23	640	352	16:9	30	TBD
0.06	320	180	16:9	30	TBD

## NETWORK

Supported Protocols	TCP/IP, UDP/IP (Unicast, Multicast IGMP), UPnP, DNS, DHCP, RTP, RTSP, NTP, IPv4, IPv6, SNMP v2c/v3, QoS, HTTP, HTTPS, SSH, SSL, SMTP, FTP, and 802.1x (EAP)
Users	
Unicast	Up to 5 simultaneous users depending on resolution settings (2 guaranteed streams)
Multicast	Unlimited users H.264 or H.265
Security Access	Password protected
Software Interface	Web browser view and setup
Pelco System Integration	VideoXpert, Endura 2.0 (or later), Digital Sentry 7.3 (or later)
Open API	Pelco API or ONVIF Profile G, Profile S, and Profile Q
Mobile Application	Integrated to Pelco Mobile App
Video Analytics	Simple motion detection and camera sabotage
Local Storage	Micro SDHC/SDXC slot (card not included), up to 2 TB Capture 1–5–10 second video clips on camera sabotage, motion detection, or alarm input; record video continuously in the case of network outage with option to overwrite; access video through FTP protocol and ONVIF Profile G

## MINIMUM SYSTEM REQUIREMENTS

Web Browser	Google Chrome 61.0 (or later), Internet Explorer® 8.0 (or later) or Firefox 3.5 (or later)
-------------	--

## ANALYTICS

Required Systems for Pelco Analytics

Pelco Interface	VideoXpert and Digital Sentry, WS5200 Advanced System Management Software on an Endura 2.0 (or later) system
Open API	The Pelco API can transmit behavior alarm data to third-party applications, available at <a href="http://pdn.pelco.com">pdn.pelco.com</a>

# TECHNICAL SPECIFICATIONS

## GENERAL

Construction	
Back Box	Aluminum
Dome Drive	Aluminum
Cable Entry (back box)	
Pendant	Through 1.5-inch NPT pendant mount
Weight (approximate)	Unit Shipping
Environmental Pendant	5.2 kg (11.5 lb) TBD
Effective Projected Area (EPA)	TBD square inches (without mount), TBD square inches (with IWM Series mount)
Clock	Real time clock
IR Wavelength	850 nm
IR Range	150 m

## ALARM

Unsupervised	Detects open or closed alarm state
Input	Two alarms, 3.5 VDC maximum, 3.5 mA maximum
Relay Output	Two outputs, $\pm 32$ VDC maximum, 150 mA maximum

## AUDIO

Input/Output	Line level/external microphone input; 1Vp-p maximum signal level
Streaming	Embedded audio

## OPERATING TEMPERATURE\*

Temperature	Environmental Pendant
Maximum <sup>2</sup>	50°C (122°F)
Minimum <sup>2</sup>	-40°C (-40°F)
Ice Free	TBD
Cold Start <sup>3</sup>	TBD
De-Icing <sup>4</sup>	TBD
Storage Temperature	-40°C to 60°C (-40°F to 140°F)

\* Assumes no wind chill factor.

<sup>2</sup> For outdoor applications.

<sup>3</sup> Cold starts within 90 minutes at specified temperature.

<sup>4</sup> Removes icing of 2.5 mm (0.1 in.) within 3 hours after power-up.

<sup>5</sup> HPoE injector accessory required for heater operation.

## OPERATING HUMIDITY

Environmental Pendant	0 to 90% RH (condensing)
-----------------------	--------------------------

## MECHANICAL

Variable Speed	0.1° to 100°/sec (manual pan speed)
Preset Accuracy	$\pm 0.1^\circ$
Pan Movement	360° continuous pan rotation
Vertical Tilt	+15° to -90° degrees
Maximum Pan Speed	Up to 300° per second
Maximum Tilt Speed	Up to 145° per second
Manual Pan/Tilt Speeds	
Pan	0.1° to 100°/sec manual operation
Tilt	0.1° to 50°/sec manual operation
Preset Speeds	
Pan	300°/sec
Tilt	145°/sec

## ELECTRICAL

Ports	RJ-45 connector for 100Base-TX Auto MDI/MDI-X Autonegotiate/manual setting
Cabling Type	Cat5e or better for 100Base-TX
Input Voltage	21 to 32 VAC; 24 VAC nominal 38 to 57 VDC; 48 VDC nominal
Input Power	
24 VAC	1 A (24 VA) maximum (without heater and blower); 3 A (70 VA) maximum (with heater and blower)
48 VDC	0.3 A (13 W) maximum (without IR, PTZ, heater and blower); 1.1 A (52 W) maximum (with IR, PTZ, heater and blower)
802.3bt (56 V)	0.3 A (12 W) maximum (without IR, PTZ, heater and blower); 1.1 A (54 W) maximum (with IR, PTZ, heater and blower)

## CERTIFICATIONS/RATINGS

- CE, Class A
- FCC, Class A
- ICES-003, Class A
- UL/cUL Listed
- RCM
- NEMA TS-2 (Temp.) para 2.2.7.3 - 2.2.7.7
- KC
- ONVIF Profile S
- ONVIF Profile G
- ONVIF Profile Q
- Environmental pendants were tested in accordance with:
  - IEC 60068-2-6 and IEC 60068-2-27
- Environmental models meet Type 4X and IP66 standards when installed properly

# TECHNICAL SPECIFICATIONS

## SYSTEM MODEL NUMBERS

Model Number	Resolution	Optical Zoom	Color	Description
P2230-ESR	2 MPx	30x	Light Gray	Spectra Pro IR Lookup Environmental Pendant

## RECOMMENDED MOUNTS

IWM-SR, IWM24-SR	Wall mount, with or without integral 24 VAC, 100 VA transformer; can be adapted for corner, parapet, or pole application
WMVE-SR	Environmental wall mount; can also be mounted using a pole
PP350/PP351	Spectra dome parapet; wall/rooftop mount

## POWER SUPPLIES

MCS Series	Multiple 24 VAC camera power supply, indoor
WCS Series	Single/multiple 24 VAC camera power supply, indoor
ECPS-48VDC-5A	48 VDC indoor power supply
POE90U1BT-EUK	90 W HPOE 802.3BT single port injector EU and UK power cord included
POE90U1BT-US	90 W HPOE 802.3BT single port injector US power cord included
POE90U1BT	90 W HPOE 802.3BT single port injector power cord not included

### Pelco by Schneider Electric

625 W. Alluvial, Fresno, California 93711 United States  
**USA & Canada** Tel (800) 289-9100 Fax (800) 289-9150  
**International** Tel +1 (559) 292-1981 Fax +1 (559) 348-1120  
**www.pelco.com** **www.pelco.com/community**

⚠ **WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).  
⚠ **ADVERTENCIA:** Cáncer y Daño Reproductivo - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).  
⚠ **AVERTISSEMENT:** Cancer et Troubles de l'appareil reproducteur - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Pelco, the Pelco logo, and other trademarks associated with Pelco products referred to in this publication are trademarks of Pelco, Inc. or its affiliates. ONVIF and the ONVIF logo are trademarks of ONVIF Inc. All other product names and services are the property of their respective companies. Product specifications and availability are subject to change without notice. ©Copyright 2018, Pelco, Inc. All rights reserved.